

070-4294

POLYNOX

RELIABLE AND FLEXIBLE

Free stall tipping drinking trough

BMR

GROUP

1501 Ampère street, suite 200
Boucherville (Québec) J4B 5Z5
450 655-6700
1 800 361-0885
bmr.co
agrizone.co

Features

Tank	Stainless steel
Housing	Moulded polyethylene
Valve	3 float valves
Mechanism	Constant water-level
Fixation	Wall-mounted or on legs (in option)
Flow rate	32 L/min each valve
Connection	½ in - 12,5 mm
Thread	Female

Avantages



- **Canadian exclusivity**
- Simple to use, it has a round handle to easilly tip the tank
- Very high flow with its three float valves
- Release system well shielded from the animals
- Water inlet and tipping mechanism are protected by a sturdy, removable housing
- Can be installed on the wall or on legs
- Ideal for dairy cows and beef cattle



32 L
PER MINUTE
PER VALVE

1/2
IN FEMALE

STAINLESS
STEEL

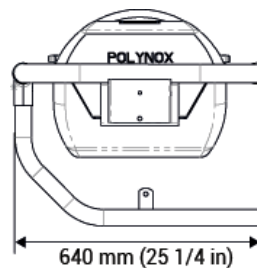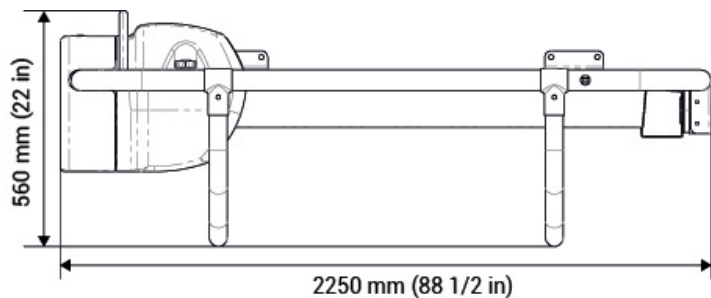

Animal	Nombre d'animal par abreuvoir	Hauteur de pose	
Heifer	40	70 cm	27 ½ in
Dairy cow	30	85 cm	33 ½ in

Accessories

Parts



Legs

075-5429



Float valve

072-6135